


LUXPOWER® SERIES 4

440-460W Mono

144 Half-Cell Layout

M6/166mm Cell

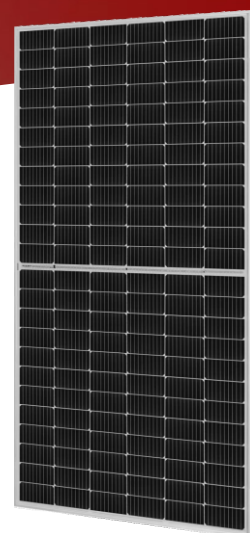

Half Cut Cell Technology



MBB Technology



Anti-PID
Low LID
Performance



Less Hot Spot
Shading Effects




Low Power
Temperature Coefficient



Lower BOS & LCOE

Linear performance Warranty

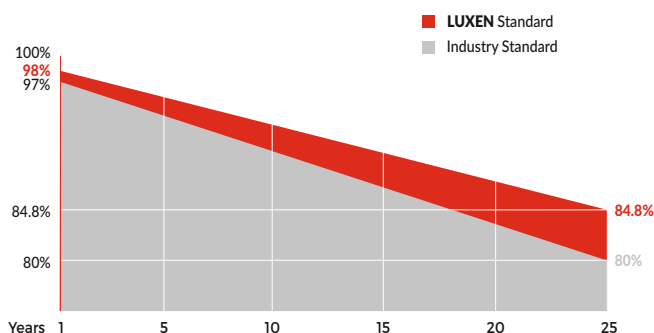

Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC 61215:2016/IEC 61730:2016 Standard quality



LUXEN SOLAR ENERGY CO., LTD.

Manufacturer add: NO.22, North Guandu Road, Wuzhong District, 215104 Suzhou, Jiangsu Province, P.R.China.


Factory add: No.1 Haiyue Road, Sutong Technologies & Industries Park, 226001 Nantong City, Jiangsu Province, P.R.China.

T: +86 512 6708 1572 | F: +86 512 6708 1570 | sales@luxensolar.com

www.luxensolar.com

MECHANICAL CHARACTERISTICS

Solar Cells	Mono
No. of Cells	144 (6x24)
Dimensions	2095 x 1039 x 35mm
Weight	23.0kgs
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm ²
Output Cables	300mm (+) / 300mm (-)
	Length can be customized
Connectors	Suzhou Xitong Photovoltage Technology Co., Ltd.
	PV-XT101.1
Mechanical load test	Front 5400Pa / Rear 2400Pa
PV Module Fire Class	Class C

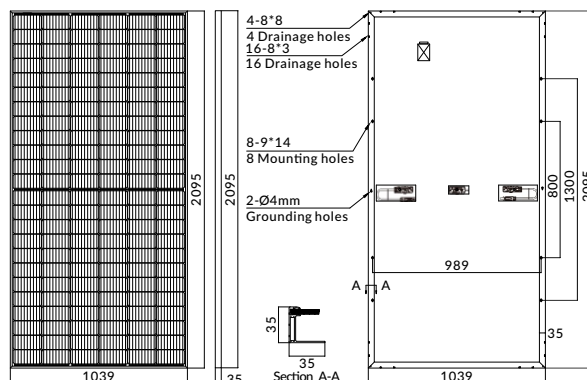

ELECTRICAL PARAMETERS



POWER CLASS	LNSU-440M		LNSU-445M		LNSU-450M		LNSU-455M		LNSU-460M	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax)	440W	324W	445W	327W	450W	330W	455W	333W	460W	336W
Open Circuit Voltage (Voc)	49.60V	45.51V	49.79V	45.54V	49.77V	45.56V	49.96V	45.59V	50.36V	45.61V
Short Circuit Current (Isc)	11.42A	9.16A	11.48A	9.22A	11.59A	9.29A	11.65A	9.35A	11.66A	9.42A
Voltage at Maximum power (Vmpp)	41.01V	37.67V	41.20V	37.77V	41.40V	37.88V	41.59V	37.98V	41.78V	38.09V
Current Maximum Power (Impp)	10.73A	8.60A	10.80A	8.66A	10.87A	8.71A	10.94A	8.77A	11.01A	8.82A
MODULE EFFICIENCY (%)	20.21%		20.44%		20.67%		20.90%		21.13%	
STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G		NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G								

PACKING CONFIGURATION

Container	20'GP	40'HQ
Pieces per pallet	31	31
Pallets per container	5	22
Pieces per container	155	682

I-V CURVE

LNSU-450M/I-V

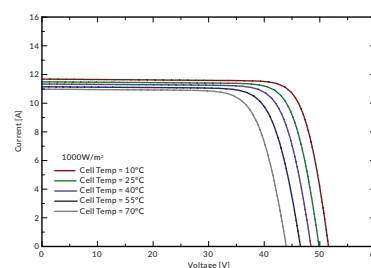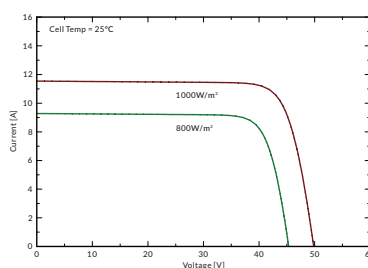

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	20A
Power Tolerance	±3%

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.36%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	+0.05%/°C

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LUXEN SOLAR have the sole right to make such modification at anytime without further notice.